consono | Business Communications

QUICK REFERENCE GUIDE

MD110 System Telephones DBC 201, 202, 203

ERICSSON

QUICK REFERENCE GUIDE

ANSWER CALLS

Answer or Access 1/2 Access 1or 2 or

Call Pick-Up Call the ringing extension 8

MAKE CALLS

Normal Calls (Dial number)

Common Abbreviated number (Dial abbreviated number)

Individual Abbreviated Number ✱✱ Digit from 0–9

Speed Dial

Last Number Redial ✱✱✱

DURING CALLS

Switch to Handset

Switch to Loudspeaker

Switch to Handsfree  *(DBC 203 only)*

Mute

INQUIRY

Activate Inquiry Call 3rd party

Refer Back to First Party C Access 1

Alternate Between Calls Access 1 Inquiry

TRANSFER

Transfer to Another Extension Make inquiry Transfer (Press before or after answer)

QUICK REFERENCE GUIDE

MOUNTING THE FOOT CONSOLES

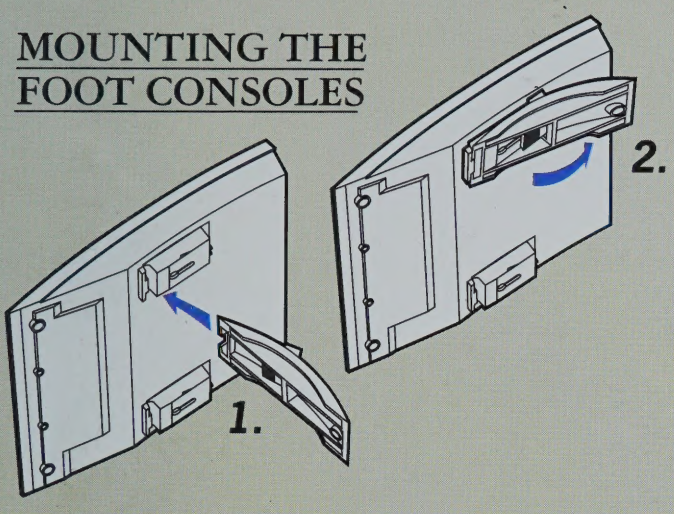

Adjusting the hook

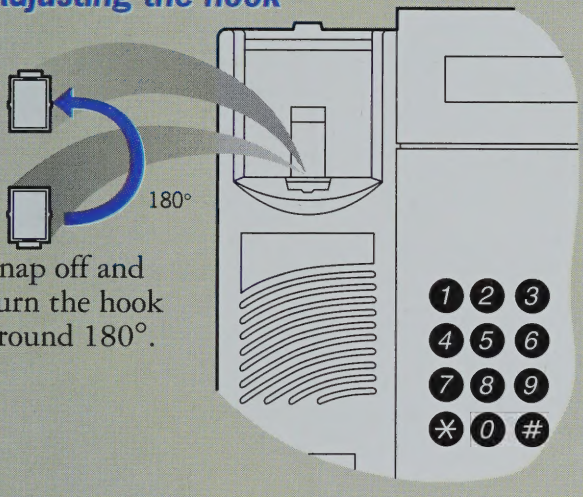

Snap off and turn the hook around 180°.

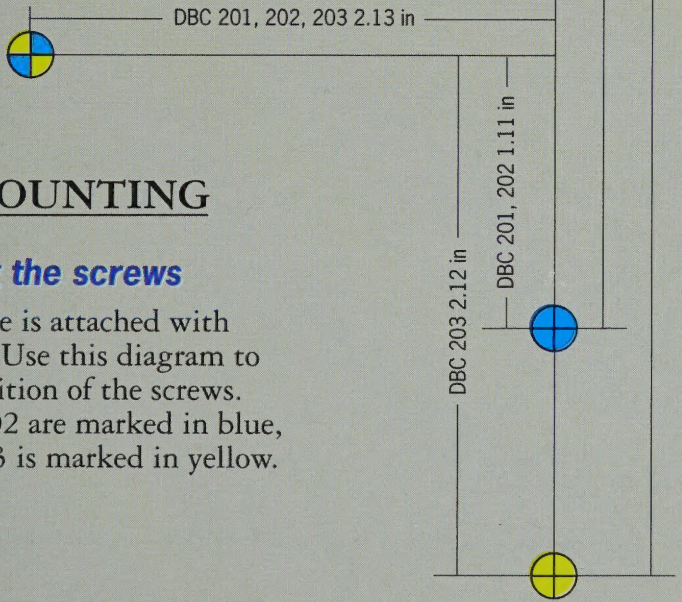

WALL MOUNTING

Positioning the screws

The telephone is attached with three screws. Use this diagram to mark the position of the screws. DBC 201, 202 are marked in blue, and DBC 203 is marked in yellow.

QUICK REFERENCE GUIDE

ANSWER CALLS

Answer — or Access 1/2 Access 1or 2 or

Call Pick-Up — Call the ringing extension 8

MAKE CALLS

Normal Calls — (Dial number)

Common Abbreviated number — (Dial abbreviated number)

Individual Abbreviated Number — * * Digit from 0–9

Speed Dial —

Last Number Redial — * * *

DURING CALLS

Switch to Handset —

Switch to Loudspeaker —

Switch to Handsfree —  *(DBC 203 only)*

Mute —

INQUIRY

Activate — Inquiry Call 3rd party

Refer Back to First Party — C Access 1

Alternate Between Calls — Access 1 Inquiry

TRANSFER

Transfer to Another Extension — Make inquiry Transfer (Press before or after answer)

QUICK REFERENCE GUIDE

ANSWER CALLS

Answer — Access 1/2 or Access 1or 2 or

Call Pick-Up — Call the ringing extension 8

MAKE CALLS

Normal Calls — (Dial number)

Common Abbreviated number — (Dial abbreviated number)

Individual Abbreviated Number — ✱✱ Digit from 0–9

Speed Dial

Last Number Redial — ✱✱✱

DURING CALLS

Switch to Handset

Switch to Loudspeaker

Switch to Handsfree — *(DBC 203 only)*

Mute

INQUIRY

Activate — Inquiry — Call 3rd party

Refer Back to First Party — C — Access 1

Alternate Between Calls — Access 1 — Inquiry

TRANSFER

Transfer to Another Extension — Make inquiry — Transfer — (Press before or after answer)

CONFERENCE

Activate — Inquiry — Call 3rd party 3

WHEN BUSY OR NO ANSWER

Callback

- **Activate** — 6
- **Cancel One** — #6✱ ext. #
- **Cancel All** — #6#
- **Call Waiting** — 5 (At busy signal)

CALL DIVERSION

Diversion All Calls

- **Activate** — Diversion
- **Cancel** — Diversion

Diversion Override

- **Activate** — ✱1✱ ext. #

Follow-Me

- **Activate** — ✱2✱ new ext. #
- **Cancel** — #2#
- **Change** — ✱2✱ own ext. ✱ new ext. #
- **Cancel from Answer-Point** — #2✱ own ext. #

External Call Forwarding

- **Activate** — ✱23# External No. #
- **Cancel** — #23#

Do Not Disturb

- **Activate** — ✱27#
- **Cancel** — #27#

DIVERSION MESSAGE

Activate — ✱24✱ Reason ✱ Time/date #

Cancel — #24#

PROGRAMMING

Individual Abbreviated Dialing

- **Program** — ✱51✱ (0–9) ✱ No. #
- **Cancel One** — #51✱ (0–9) #
- **Cancel All** — #51#

Speed Dial

- **Program** — Program — Program No. Program
- **Cancel** — Program — C — Program

VOLUME CONTROL

Tone Ringer Volume — − + ■■□□□□□□

Handset Volume (Pick up handset) — − + ■■□□□□□

Handsfree/ Loudspeaker Volume — − + ■■□□□□□□

*For *Diversion options* see the Easy Guide on the back pages.

EASY GUIDE

Tone Ringer Character

Program (0–9) Program

Ring Options

Program Access (0–6) Access Program

0 no ringing (flash only)
1 normal ringing
2 delayed normal ringing
3 two rings then flash only
4 flash, two rings, flash
5 immediate speech connection (function key controlled)
6 immediate speech connection

FEATURE	ACTIVATION	DEACTIVATION
Call Pick-Up	extension 8	
Call Waiting	5 (at busy signal)	
Callback	6	#6#
Common Hold	8	
Conference	Inquiry 3rd party 3	
Diversion All Calls	Diversion	Diversion
Diversion Message	*24* reason * time/date #	#24#
Diversion Override	*1* extension #	
Do Not Disturb	*27#	#27#
External Call Forwarding	*23# ext. no. #	#23#
Follow Me		
Activate	*2* extension #	#2#
Change	*2* own ext. * new ext. #	#2* own ext. #
Individual Hold	Access	
Inquiry	Inquiry 3rd party	C Access
Last Number Redial	***	
Transfer	Inquiry 3rd party Transfer	

Ericsson Inc.
Business Systems
1 Triangle Drive
Research Triangle Park, NC 27709
Telephone: (800) 374-2776

EN/LZT 102 2230 RB
© Ericsson Business Networks AB 1995

Abrahamsons Tryckeri, Karlskrona 96.06